迈福龙®
MY FLOORING



FLOOR
Homogeneous Vinyl

同透综合本

100% NATURAL
Environmental
Protection Free From
Contamination

Hospital Factary School
Transportion Publicbuildings
Nursery Maket Office

星光
SERIES

同质透心卷材地板

Size:2.0mm(T)x2m(W)x20m(L)
100%纯新环保料.不含回收再生材料



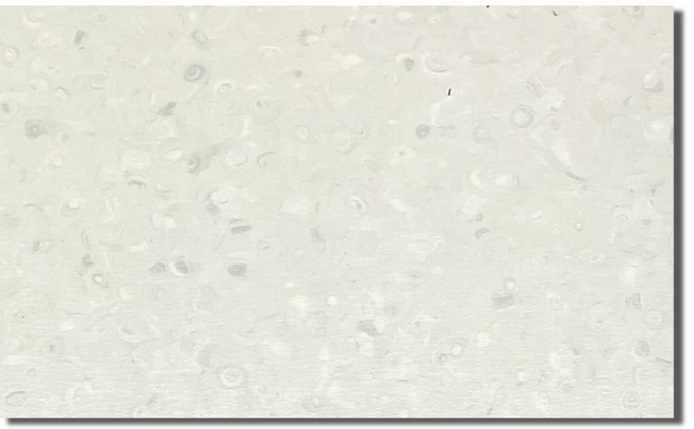
Silver Grey

K822-001 银灰



Iron Grey

K822-002 铁灰



Light Gray

K822-003 浅灰 NEW



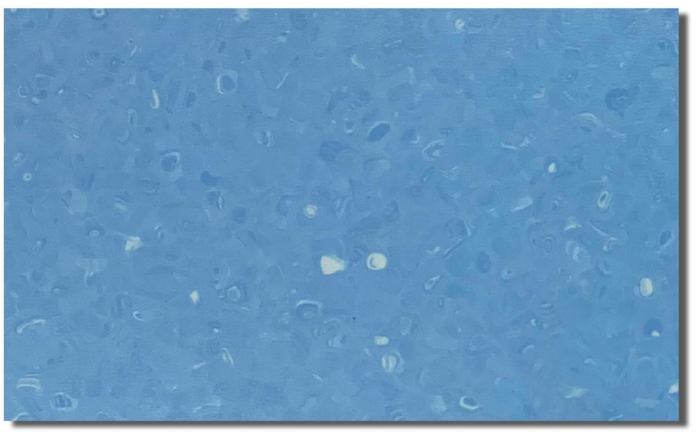
Straw Yellow

K822-101 稻草黄



Peacock Blue

K822-220 孔雀蓝 NEW



Moon Blue

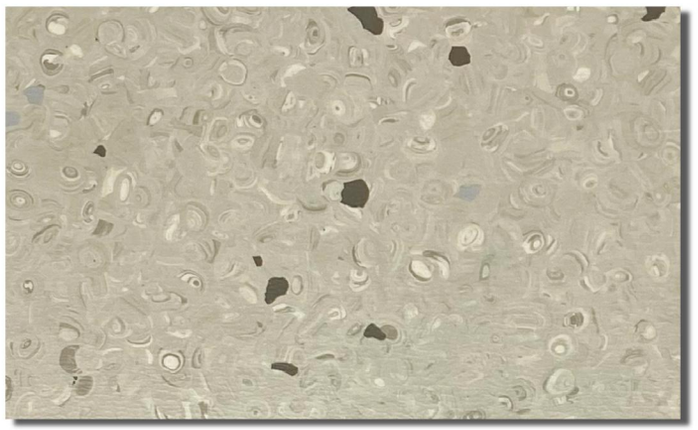
K822-602 月光蓝



样本仅供为选色使用,封样请以实际大样为准

同质透心卷材地板

Size:2.0mm(T)x2m(W)x20m(L)
100%纯新环保料.不含回收再生材料



Leaden Grey

50004 铅灰



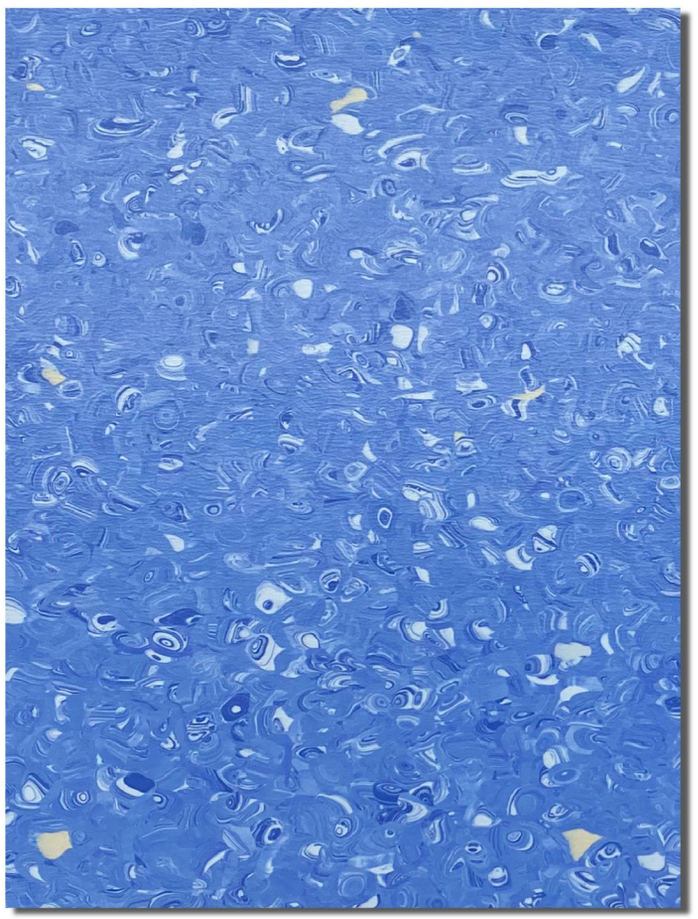
Camel Ash

50005 驼灰



Zephyr

50007 藕灰



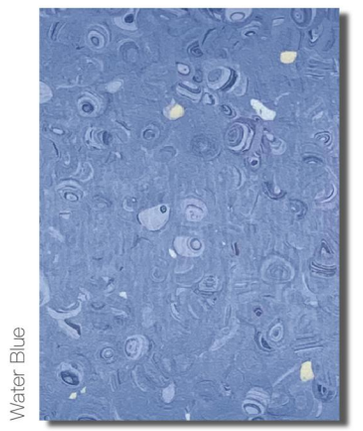
Ice-snow Blue

50220 冰雪蓝 NEW



Cobalt Blue

50022 钻蓝



Water Blue

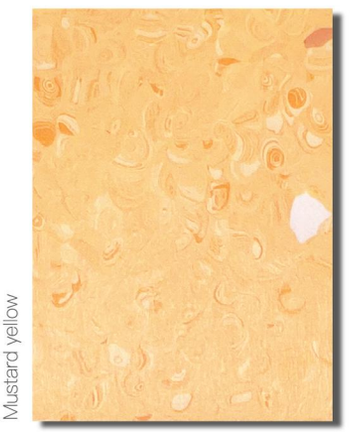
50021 清水蓝





Crescent yellow

50009 月牙黄 NEW



Mustard yellow

50016 芥末黄



Green and yellow

50657 青黄 NEW

样本仅供为选色使用,封样请以实际大样为准

同质透心卷材地板

Size:2.0mm(T)x2m(W)x20m(L)
100%纯新环保料.不含回收再生材料



Pale yellow

5324 浅黄 NEW



Pale yellow

5305 淡黄



Sky Grey

5312 天灰



Smoky Grey

5310 烟灰



Concrete Grey

5329 水泥灰



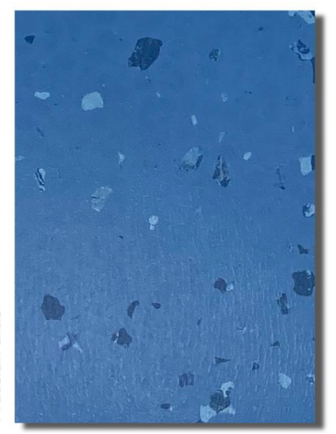
Storm Blue

5340 蟹灰



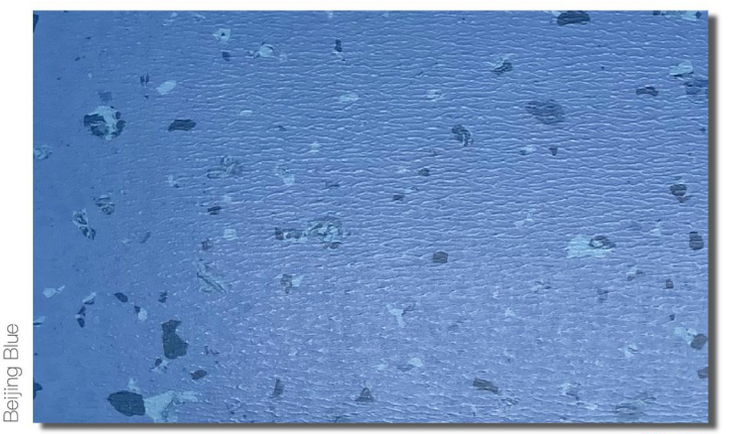
Powder Blue

5306 粉末蓝



Prussian Blue

5366 普鲁士蓝



Beijing Blue

5320 北京蓝 NEW

PHTHALATE FREE

健康安全的环境

秉承健康、安全、环保的理念 LCAI LOONG 不断优化和改进 PVC 地材产品的原材料配方，产品采用环保型非邻苯类增塑剂，确保给使用者提供一个健康安全的环境。

≤15μg/m³
Optimal Indoor Air Quality
*TVOC AT 28 DAYS

优异的室内空气质量

TVOC是对挥发性有机化合物的统称，主要来源于燃料的燃烧产物和人工制品(例如室内装修材料、涂料、家具、地板等的释放物。LCAI LOONG产品的TVOC释放量近乎为零，处于行业内领先水平，保障优异的室内空气质量。

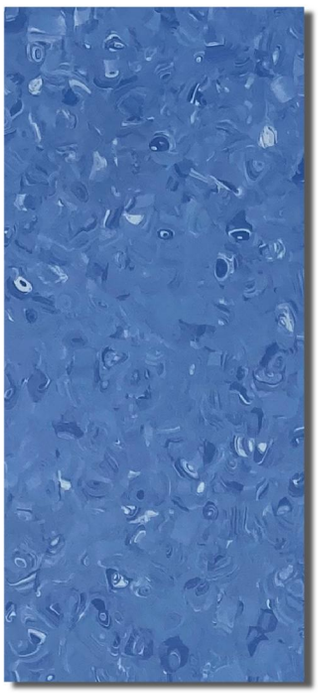
最佳的产品生命周期成本

独特的钻石盾表面处理技术，结合优异的产品结构，使产品高度耐污渍、耐磨损，极易清洁养护,达到最佳生命周期成本。


样本仅供为选色使用,封样请以实际大样为准

同质透心卷材地板


Size:2.0/2.5/3.0mm(T)x2m(W)x20/15m(L)
100%纯新环保料.不含回收再生材料



Sky Blue
792020 蔚蓝


Dust Grey
792009 土灰


Azure Celeste
792016 天蓝


Smoky Grey
792008 烟灰

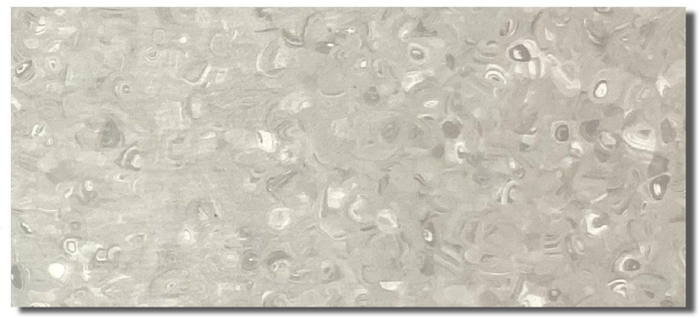

Sea Blue
792019 海蓝

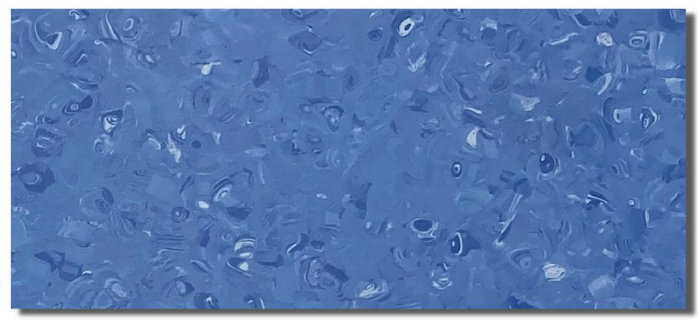

Grey Black
792010 黑灰


Sunny Yellow
792004 日光黄



Lemon Yellow
795555 柠檬黄

2.5mm/3.0mm 现货供应



Dust Grey
25792009/30792009 土灰



Sky Blue
25792020/30792020 蔚蓝


Grey Black
25792010/30792010 黑灰


Sunny Yellow
25792004/30792004 日光黄


Field Green
797777 原野绿


Agate Red
793333 玛瑙红


Rouge Red
791111 胭脂红

样本仅供为选色使用,封样请以实际大样为准

产品规格 PRODUCT SPECIFICATIONS

规格 / Description	标准 / Standard	单位 / Unit	数值 / Result
材料类型/Type of flooring	EN 649		同质透心卷材/Homogeneous Sheet
材质/Material			聚氯乙烯树脂/Polyvinyl chloride resin
安全要求 / Safety Requirements			
防火/Fire rating	EN 13501-1	等级	Bf1
防湿滑性能/Slip resistance	DIN 51130	组	R9-R10
有毒有害物质检测/Toxic testing	GB 18586-2001	-	合格
性能数据 / Performance Data			
卷宽/Roll width	ISO 26987-2008	m米	2.0
卷长/Roll length	ISO 26987-2008	m米	20/15
总厚度/Overall thickness	ISO 26987-2008	mm毫米	2.0/2.5/3.0
残留凹陷度/Residual indentation	ISO 26987-2008	mm毫米	0.04
尺寸稳定性/Dimensional stability	ISO 10581-2019	-	MD -0.1%AMD 0%
色牢度/Colourf fastness	ISO 105-B02:2014	-	≥6
抗污性能/Stain resistance	ISO 26987:2008 (E)	-	No stain 0无污染
特殊维护处理/Special maintenance treatment		-	钻石盾 特殊处理
椅子脚轮测试/Castor chair test	ISO 4918:2016	-	无损坏
分类 / Classification			
家用/Homes	ISO 26987-2008	class 等级	23 heavy duty 重承载
商用/Commercial	ISO 26987-2008	class 等级	34 very heavy duty 极重承载
工业/Industrial	ISO 26987-2008	class 等级	43 heavy duty 重承载
室内空气质量 / Indoor Air Quality			
甲醛释放量/Formaldehyde Emission	EN 717-1:2004	-	未检出
邻苯二甲酸盐含量/DOP content	EN 15777	-	不含有
重金属含量/Heavy metal	EN 71-3	-	不含有
VOC有害物质/VOC harmful substances	GB 18586-2001	-	PASS

安装 / INSTALLATION

样本仅供作为选色参考使用
封样请以实际大样为准

应按照当地标准进行安装。铺设地板前，应确保地面平滑、坚硬、清洁和干燥。如有需要，应在地面上铺设一层有效的防潮薄膜。安装地板前，应提前24小时将地板材料放置在18-24°C室温内适用环境。

Installation should be carried out in accordance with local standards. Before laying the floor, ensure that the floor is smooth,Hard, clean and dry. If necessary, an effective layer should be laid on the groundMoisture-proof film. Before installing the floor, the floor material should be placed 24 hours in advanceSuitable environment at room temperature of 18-24°C.

维护 / MAINTENANCE

铺装之后可以不必立即打蜡。定期进行维护以使其保持外观整洁和耐用性。定期清扫和使用中性清洁剂湿擦来维护地板。或者使用具有精细喷雾垫的清洗机进行大面积地面的清洗。

No wax is needed right after installation. Maintenance should be carried out regularly to keep the appearance and well durability of the floor, The floorcovering should be maintained with regular sweeping anddamp mooting using neutral cleanser, More intense cleaning should be caried out using a fine spraycleaning pad under a floor machine, or for larger areas combines machine cleaning.

REACH
COMPOSITION
100% REACH compliant
成分100%符合REACH规定

INDOOR AIR QUAILITY
室内空气质量

RECYCLED CONTENT
RECYCLED CONTENT
成分环保

RECYCLABILITY
100%
产品100%回收

WELLNESS
健康